BOSTITCH®

BT125

INDUSTRIAL OIL-FREE BRAD NAILER

TOOL PARTS ILLUSTRATION
ILUSTRACIÓN DE LAS PIEZAS DE LA HERRAMIENTA
ILLUSTRATION DES PIÈCES D'OUTILLAGE

⚠WARNING: **⚠ ADVERTENCIA:** **⚠ ATTENTION:**

BEFORE PERFORMING REPAIRS ON THIS TOOL, ALL OPERATORS SHOULD STUDY THIS ILLUSTRATION, AS WELL AS THE PARTS LIST AND OPERATION AND MAINTENANCE MANUAL. OPERATORS SHOULD UNDERSTAND AND FOLLOW ALL SAFETY WARNINGS AND INSTRUCTIONS. KEEP THIS ILLUSTRATION WITH THE TOOL FOR FUTURE REFERENCE. IF YOU HAVE ANY QUESTIONS, CONTACT YOUR BOSTITCH REPRESENTATIVE DISTRIBUTOR.

ANTES DE LLEVAR A CABO CUALQUIER REPARACIÓN EN LA HERRAMIENTA, TODOS LOS OPERARIOS DEBERÁN ESTUDIAR ESTA ILUSTRACIÓN, ASÍ COMO LA LISTA DE PIEZAS Y EL MANUAL DE OPERACIÓN Y MANTENIMIENTO. LOS OPERARIOS DEBERÁN ENTENDER Y SEGUIR TODAS LAS ADVERTENCIAS E INSTRUCCIONES DE SEGURIDAD. CONSERVE ESTA ILUSTRACIÓN CON LA HERRAMIENTA PARA PODER CONSULTARLA EN LO FUTURO. SI TUVIERA ALGUNA PREGUNTA, PÓNGASE EN CONTACTO CON SU REPRESENTANTE O DISTRIBUIDOR DE BOSTITCH.

AVANT DE PROCÉDER À LA RÉPARATION DE CET OUTIL, LES OPÉRATEURS DOIVENT ÉTUDIER LA PRÉSENTE ILLUSTRATION AINSI QUE LA LISTE DE PIÈCES ET LE MANUEL D'INSTRUCTIONS ET D'ENTRETIEN ; ILS DOIVENT ÉGALEMENT COMPRENDRE ET OBSERVER LES CONSIGNES DE SÉCURITÉ ET LES INSTRUCTIONS. CONSERVER CETTE ILLUSTRATION AVEC L'OUTIL POUR RÉFÉRENCE FUTURE. SI VOUS AVEZ DES QUESTIONS, COMMUNIQUEZ AVEC VOTRE REPRÉSENTANT OU VOTRE DISTRIBUTEUR DE BOSTITCH.

IP1143-1REVB 12/01

BOSTITCH®
Stanley Fastening Systems

Available Accessories:

68 CNTK-1 Contact trigger conversion kit
69 SEQ4 Sequential trigger conversion kit

Litho in U.S.A.

BT125-1
CONTACT ACTUATED TRIGGER ASSEMBLY (BLACK)

FIGURE 1

BT125-2
SEQUENTIAL ACTUATED TRIGGER ASSEMBLY (GREY)



FIGURE 2

BT125-3
TRIGGER ACTUATED ASSEMBLY

FIGURE 3

BT125
INDUSTRIAL OIL FREE BRAD NAILER

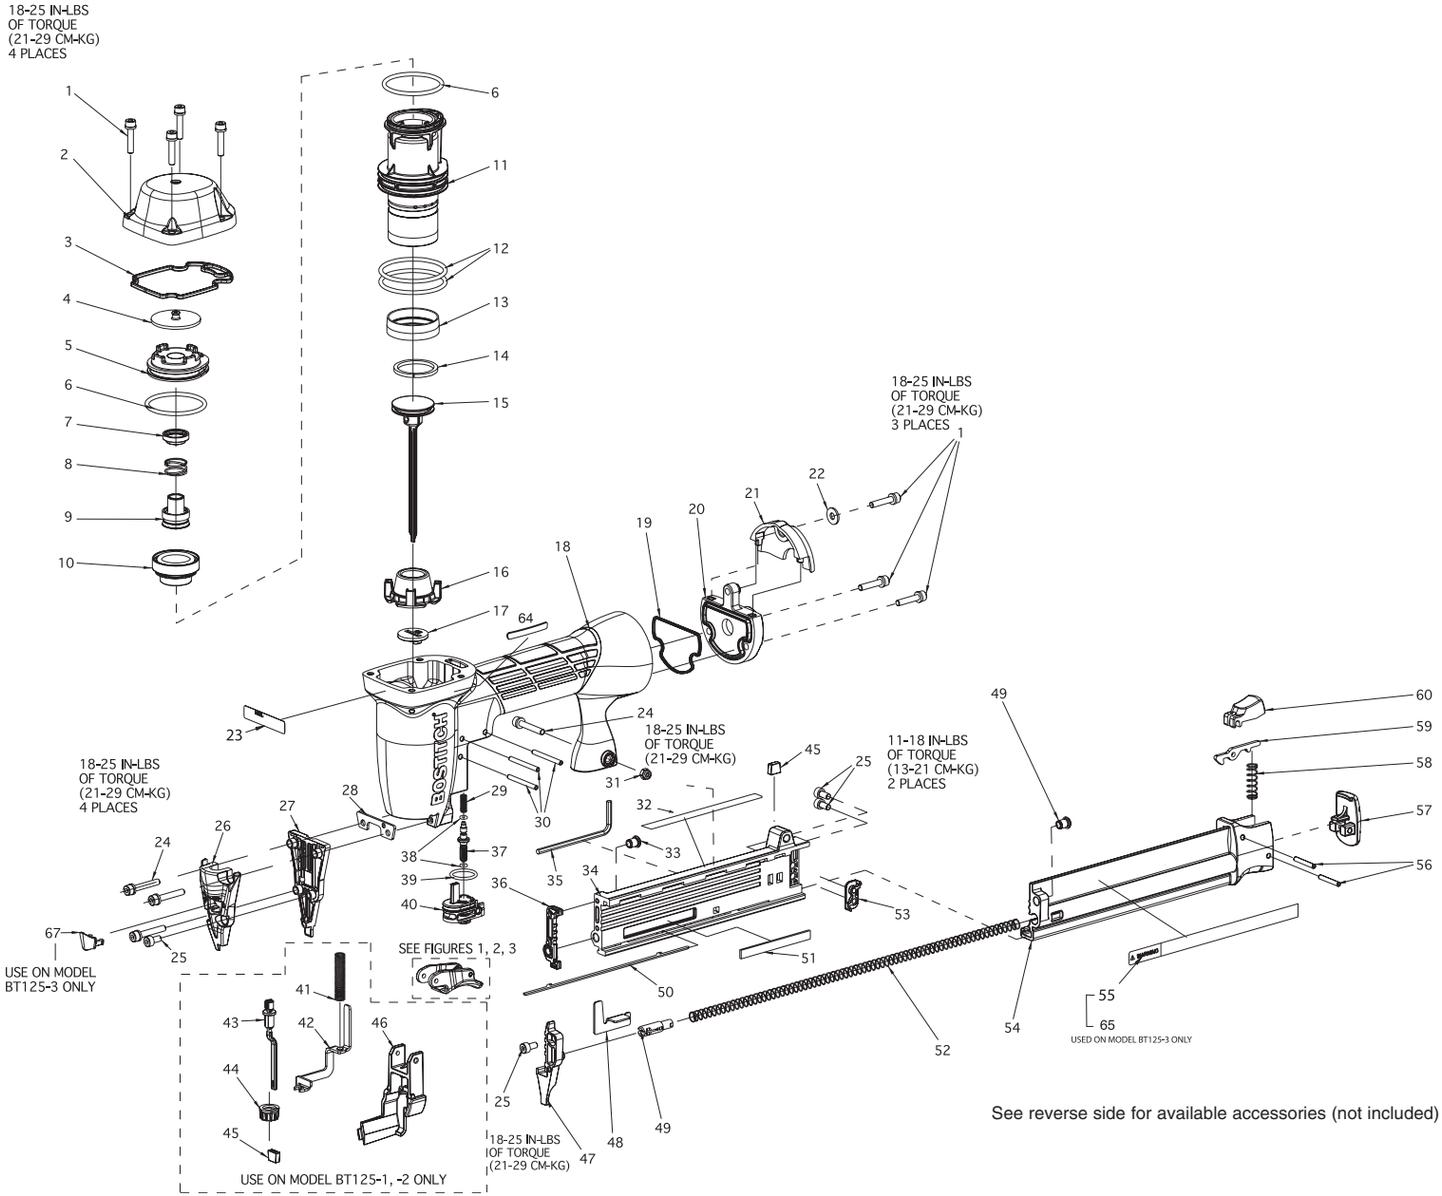
18-25 IN-LBS OF TORQUE (21-29 CM-KG) 4 PLACES
18-25 IN-LBS OF TORQUE (21-29 CM-KG) 3 PLACES
18-25 IN-LBS OF TORQUE (21-29 CM-KG)
11-18 IN-LBS OF TORQUE (13-21 CM-KG) 2 PLACES
18-25 IN-LBS OF TORQUE (21-29 CM-KG) 4 PLACES
SEE FIGURES 1, 2, 3
USE ON MODEL BT125-3 ONLY
USE ON MODEL BT125-1, -2 ONLY
18-25 IN-LBS OF TORQUE (21-29 CM-KG)
USED ON MODEL BT125-3 ONLY
BOSTITCH

See reverse side for available accessories (not included)